

DRYWALL SCREW TN Super Premium C5

Product description:

Drywall screw with high resistance against corrosion, designed for fixing plasterboard to metal profiles with metal thickness up to 0.7 mm.

Available Sizes: 3.5 x 25 mm



Standard Classification:

In compliance with **EN 14566:2008**
 Type **TN**
 Category for Protection Against Corrosion, acc. EN ISO 12944-2:
Class C5 Highest Level of Protection



Aggressive Environment Examples - Class C5:

- External
 - Industrial zones, coastal areas and buildings near the beach with high levels of salt in the air.
- Internal
 - Buildings and areas subject to constant condensation, intense humidity and high levels of pollutants e.g. sea water or thermal baths.


Technical Data:

Parameters:	Specification:
Reaction to fire	A1
Corrosion resistance classification	48 hrs
Drilling time requirement	< 2 sec

Storage:

Product	$d_w \times L_w$	Box
Drywall Screw TN 3.5 x 25 Super Premium C5	3.5 x 25 mm	1000 pcs

- ✓ Packaged in distinctive green Technogips Pro boxes with included PH2 screw bit
- ✓ Store in a dry, covered and ventilated area

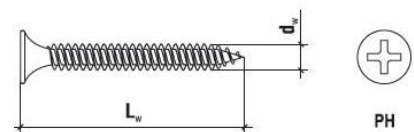

Safety recommendations:

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. 2021©