


Acoustic Adjusting Bracket 125

Acoustic Adjusting Bracket is ideal for direct suspension of Premium Profiles CD 60 to solid walls and ceilings. Thanks to the integrated rubber damper at its base, the Acoustic Adjusting Bracket improves effectively sound proofing of premises by stopping the spread of impact noise and vibrations from the floor and ceiling.

Available Sizes: 125 mm
Metal thickness: 0.8 mm

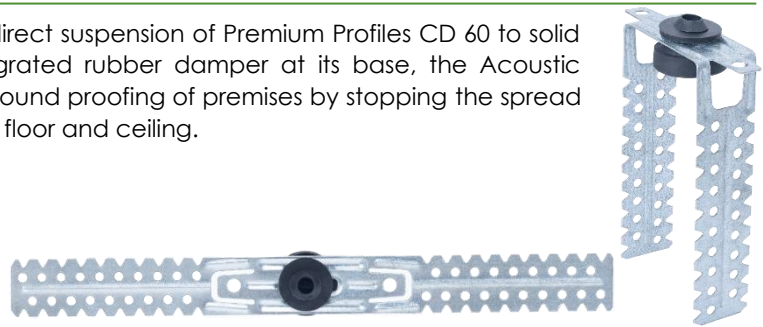

Standard Classification:

In compliance with EN 13964:2014




Advantages:

- ✓ Integrated rubber damper at the base for effective sound proofing of the premises.
- ✓ Innovative, centrally positioned rib design, for increased stability and recommended load carrying capacity (min 0.40 kN | 40 kg).
- ✓ Uniform metal thickness of 0.8 mm, for added strength.
- ✓ Easy levelling due to the shoulder positioned service holes.
- ✓ Minimized loss of useful space in the room.

Technical Data:

Parameters:	
Steel thickness	0.8 mm
Reaction to fire	A1
Corrosion resistance class:	B
Recommended load-bearing capacity F	0.40 kN
Max. load-bearing capacity admF	0.50 kN



Packaging and Storage:

Product	Dimensions L _w / d _w	Thickness	Box
Acoustic Adjusting Bracket 125	120 / 60 mm	0.8 mm	100 pcs

- ✓ 100 pieces in every box. Packaged in distinctive green Technogips Pro boxes.
- ✓ Store in a dry, covered and ventilated area.

Safety recommendations:

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. June 2022©