


Premium CD Cross Connector

Premium CD Cross Connector, ideal for securing a strong cross-tie between the load carrying and fastened CD 60 in constructing double level suspended ceilings.

The grey coloured Zink coating guarantees the vast corrosion resistance of the element.

Metal gauge: 0.8 mm

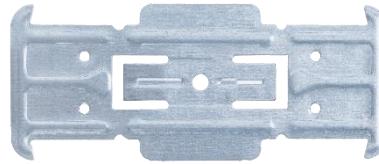

Standard Classification:

In compliance with EN 13964:2014



Advantages:

- ✓ The increase of the uniform metal thickness of 0.8 mm, for a stronger tie
- ✓ Easy levelling with profile through bending capabilities of shoulders
- ✓ Can be installed directly over a CD extension accessory
- ✓ Ideally paired with Technogips Pro Premium Profile CD 60
- ✓ Quick and easy application

Technical Data:

Parameters:	
Steel thickness	0.8 mm
Reaction to fire	A1
Corrosion resistance class:	B
Recommended load-bearing capacity F	0.40 kN
Max. load-bearing capacity admF	0.60 kN

Safety recommendations:

- ✓ 100 pieces in every box. Packaged in distinctive green Technogips Pro boxes
- ✓ Store in a dry, covered and ventilated area

Safety recommendations:

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. June 2022©