

Self-drilling Screw TB

Technogips Pro Self-drilling Screw TB, corrosion resistant, designed for fixing plasterboards to metal profiles with a metal thickness of up to 2 mm.

The black coloured, phosphate coating guarantees the vast corrosion resistance of the element.

Available Sizes: 3.5 x 25, 35, 45, 55 mm






Standard Classification:

In compliance with EN 14566:2008, Type **TB**



Advantages:

-  ✓ PH 2 screw plug included in every box
-  ✓ The flat countersunk head of the screw fastens to the plasterboards with greater ease.
-  ✓ Self-drilling point and specially designed thread help to drill the metal profile directly, with ease.


Technical Data:

Parameters:	Specification:
Reaction to fire	A1
Corrosion resistance classification	48 hrs
Drilling time requirement	< 2 sec

Packaging and Storage:

Product	d _w x L _w	Box	Boxes in a carton
Drywall Screw 3.5 x 25	3.5 x 25 mm	1000 units	16 units
Drywall Screw 3.5 x 35	3.5 x 35 mm	1000 units	12 units
Drywall Screw 3.5 x 25	3.5 x 45 mm	500 units	8 units
Drywall Screw 3.5 x 35	3.5 x 55 mm	500 units	6 units

- ✓ Packaged in distinctive green Technogips Pro boxes with included PH2 screw plug
- ✓ Store in a dry, covered and ventilated area

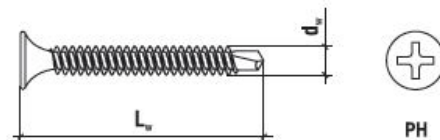

Safety recommendations:

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. 2021©