


**Angle for UA 50 / 75 / 100 Profile**

Technogips Pro Angle for fixing of UA profile to floors and ceilings of the door and window openings in partition and façade walls executed through the methods of dry construction.

The grey coloured Zink coating guarantees the vast corrosion resistance of the element.

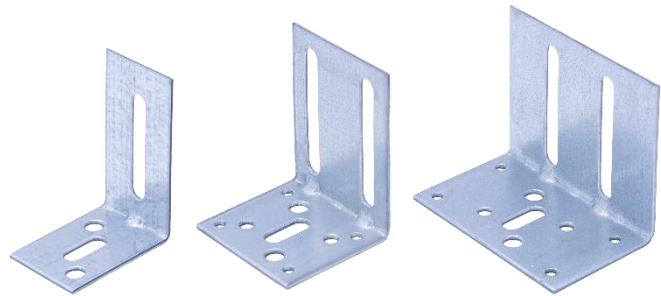

Metal thickness: 2.0 mm

**Standard Classification:**

In compliance with EN 14195:2015



**Advantages:**

- ✓ Extremely strong bond
- ✓ Can be used with both UA and CW profiles
- ✓ Quick and easy application

**Technical Data:**

Properties	
Steel Thickness	2.0 mm
Reaction to fire	A1
Corrosion resistance class:	B



**Packaging and Storage:**

Product	Width	Dimensions, AxB	Gauge	Box
Angle for UA 50	50 mm	78x54	2.0 mm	100 pcs
Angle for UA 75	75 mm	78x54	2.0 mm	100 pcs
Angle for UA 100	100 mm	78x54	2.0 mm	100 pcs

- ✓ 100 pieces in every box. Packaged in distinctive green Technogips Pro boxes
- ✓ Store in a dry, covered and ventilated area

**Safety recommendations:**

- ✓ Product not classified as hazardous.
- ✓ The use of safety gloves is strongly advisable when working with this product, in prevention from physical harm.

Technogips Pro reserves the right to change any of the specifications and technical data mentioned in the Technical Data Sheets at its sole discretion without prior notification. June 2019©